

Perform

Flexible lead free roof flashing




- ✓ Environmentally friendly with no leaching of chemical or colouring agents.
- ✓ Perform is light weight being 1/3 the weight of lead.
- ✓ Great form stability for fast and easy mounting
- ✓ Range of rolls in various sizes are available in Grey and Black.



Stretching ability:

60% lengthwise and
20% breadthwise

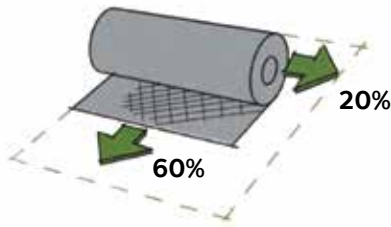

Rolls

Code	LENGTH (M)	WIDTH (MM)	WEIGHT (KG)
PFR4-300G	4	300	4.32
PFR4-300B	4	300	4.32
PFR4-450G	4	450	6.48
PFR4-450B	4	450	6.48
PFR4-600G	4	600	8.64
PFR4-600B	4	600	8.64

Important

- Remember to place flashing material correctly according to the actual need for stretching ability.
- Cut the flashing using a trade knife or sheet metal shears.
- When pre-fixing and shaping joints are required, use adhesive if deemed necessary.
- Use the Perform hammer to dress down leading edges.
- If painting is required, we recommend 100% Acrylic Low Sheen exterior paint.
- When lapping joints, 150mm overlap is recommended.
- Perform has the ability to expand and contract, thus allowing minimal joints.

Installation Information

- 1 Perform flexible flashing is fixed easily and fast. The light weight and excellent stretching properties ensure simple handling and shaping of the flashing. To obtain a perfect fit use a perform hammer.
- 2 The side with the protection film is the visible or upper side of the material. This is to prevent the flashing material from getting dirty.
- 3 By folding the bottom edge it becomes significantly stronger and the roof cover then becomes even more stable in shape.
- 4 Being self-contained, Perform flexible flashing does not require adhesives. A self contained flashing is porous/breathable and prevents formation of humidity and condensation under the area covered.
- 5 When ever deemed necessary you can make terminations against walls, roofs, valley, gutters etc. For adhesive process use Z BOND Metal & Masonry Silicone V4. Spot adhesion technique is recommended.