


DEKTITE®

Retrofit™ Soaker™

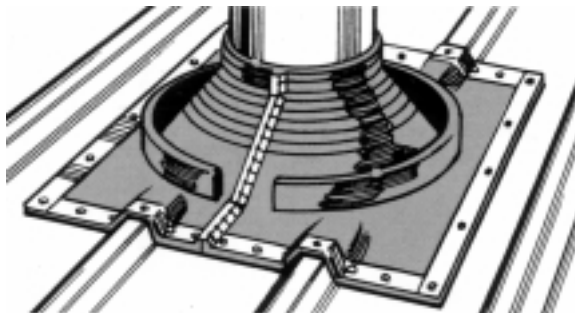

As with other Dektite® products Dektite® Retrofit™ Soakers™ make the job faster, and more cost efficient. Like standard Dektite® Retrofit™ they are designed to flash where access to installation is restricted. Just like a standard Retrofit™ their unique crimp closure mechanism makes pipe or vent flashing an elementary wrap and seal procedure requiring no soldering or special tools. Rain, hail, or shine it's all lovely weather for Dektite® Retrofit™ Soakers™. They flex with the roof decking without cracking or leaking and their smooth non-damming tray area means water run-off is super efficient. Dektite® Retrofit™ Soakers™ are ideal for maintenance work all year round.

One Standard size: for 235 - 425mm pipes.

CODE	PIPE mm	BASE mm	PITCH	COLOUR
RFS 4	235 - 425	750 - 660	0 - 45°	GREY (EPDM)

E.P.D.M. withstands temperatures from -50°C to 115°C, & up to 150°C intermittently



Measure outside pipe diameter and trim cone exactly where indicated.



With clip in down-stream position tension top of cone around pipe and engage metal teeth in opposing pockets.



Crimp the top three clips with pliers. To assist in completion of crimp, place hand behind the seam for support and continue crimping. Do not overcrimp.



Form Dektite base into contours of roofing sheet, positioning loose strips on either side of cone in best position to ensure drainage of pan or tray and trim sides if necessary. Trimming should be considered prior to cutting of the roof sheet.



Mark out area where ribs of roof panel are to be removed. Where necessary support cut sections of sheet with additional roof framing.



Apply a neutral-cure silicone sealant* to underside of Dektite® base and press to contour of sheet profile.



Fasten flashing to roof using washered self-drilling screws. Secure clip by placing a fastener either side of the clip



Apply neutral-cure sealant* to top of crimp closure and any other potential leak areas.

***Refer to page 28 for silicone usage**

HINT: When flashing a metal flue that has an exposed seam, using a neutral cure sealant, seal the seam from underside of cowl to the top of Dektite® cone.